

ModularMaster

Pair of permanent magnet motors, liquid-cooled and parallel assembled for high power with low voltage. Ideal for anyone requiring system redundancy with flexible installation and compactness.

Liquid Cooled



with SPD11 Split Power Drive

Including:

- True redundancy in case of one motor failure
- Aluminum made split power drive
- Mounting brackets and silent blocks
- Live PTO available
- Vector control inverters IP65
- Precharge circuit
- DC-DC converter 12 Vdc
- 5m cable for display, lever, key
- Quick install / easy connect / plug and play
- Inlet and outlet liquid connections
- Closed loop liquid cooling mounted aboard
- Key panel (OFF-ON-ECO)
- Throttle lever TFC
- TF display NMEA2000

Optional:

- Main switch and main fuse (Only for 48/96/144Vdc battery w/o internal switch and fuse)
- Drop box DP280 (ratio $i = 1.59 - 2.01 - 2.41 - 2.87 - 3.35 - 3.97 - 5.01$)

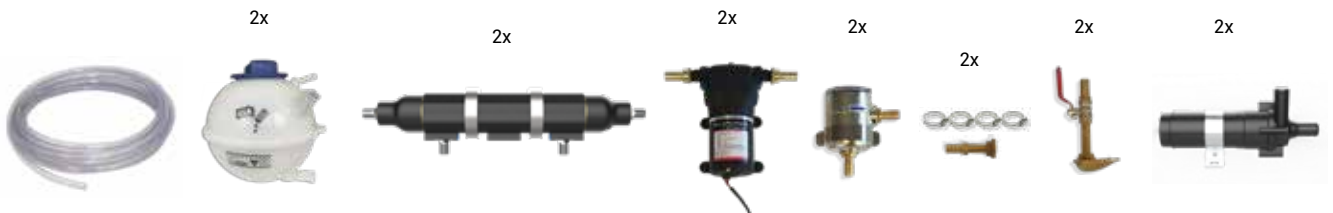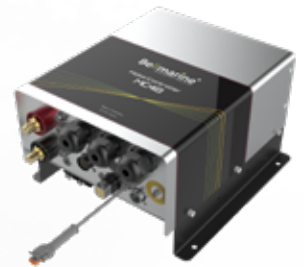

Medium & Heavy Duty

PRODUCT CODE	DESCRIPTION	MOTOR SIZE	NOMINAL kW	INTERMITTENT kW	BATTERY Vdc	MOTOR rpm
BV201450W	ModularMaster 40W EVO	2x220-20 (s)	30	40	48 (51)	1500
BV101485W	ModularMaster 40W	2x220-20	30	40	96 (102)	
BV101480W	ModularMaster 60W	2X220-35	50	60	144 (140)	

(s) Special

() Transfluid battery

* For twin screw application ask for appropriate product code

• Complete the scope of supply with accessories from p. 19